## RANGE COMPOSITION

Zanussi Professional offers a range of ice-making machines specially designed to produce ice cubes. All the models, whilst having a compact size, offer excellent performance and maximum efficiency. The range has been specifically designed for use in bars, restaurants, hotels and discos and can also be used in medical facilities.



## 140/200 KG ICE CUBERS ZANUSSI PROFESSIONAL

## FUNCTIONAL AND CONSTRUCTION FEATURES

 All models are available in air-cooled or water-cooled versions\*.
The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting.

◆ R404a refrigerant.


◆ Reliability is guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in ABS) and the sophisticated product and process technology involved.

• The compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.

 The metal sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
All models comply with the standards required by the main international approval bodies and are H marked.

\* Water consumption and productivity have been calculated using a water temperature of 15°C and an ambient temperature of 21°C.

CHARACTERISTICS	MODELS				
	IMC140AB20 730173	IMC140WB20 730174	IMC200AB20 730175	IMC200WB20 730176	
Air cooled	•		•		
Water cooled		•		•	
Output - kg/day	140	140	200	200	
Bin capacity - Kg	200	200	200	200	
External dimensions - mm					
width	870	870	870	870	
depth	790	790	790	790	
height	1707	1707	1800	1800	
Refrigerant type	R404a;	R404a;	R404a;	R404a	
Power - kW					
installed-electric	1.4	1.4	1.6	1.6	
Net weight - kg.	159	159	164	164	
Power supply - V, phases, Hz	220-240 V, 1N, 50	220-240 V, 1N, 50	220-240 V, 1N, 50	220/240 V, 1N, 50	
INCLUDED ACCESSORIES					
S/S COLLECTION BIN 200KG FOR ICE MAKERS	1	1	1	1	

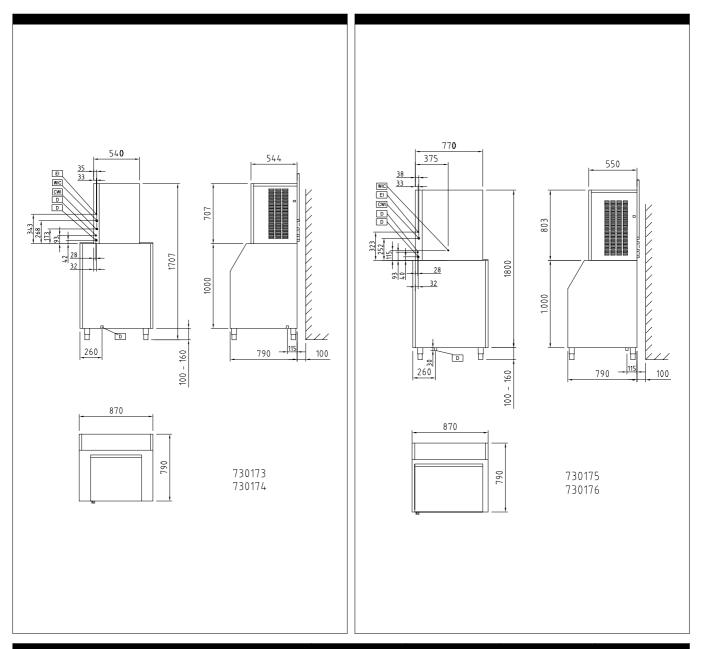

	IMC140AB20 730173	IMC140WB20 730174	IMC200AB20 730175	IMC200WB20 730176
CWI - Cold water inlet	3/4"	3/4"	3/4"	3/4"
D - Water drain	24mm	24mm	24mm	24mm
EI - Electrical connection	220-240 V, 1N, 50	220-240 V, 1N, 50	220-240 V, 1N, 50	220/240 V, 1N, 50





www.zanussiprofessional.com

DDAM01